




**2 BNC Female to RJ 45 Converter :-**

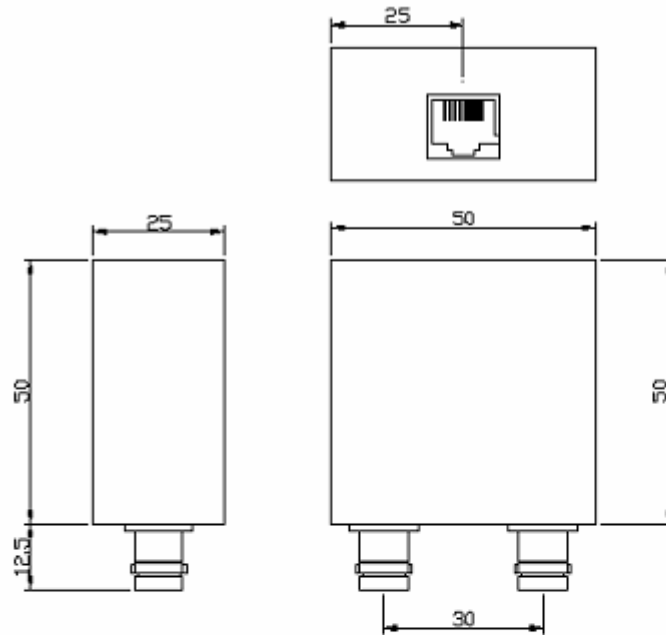

RJ45 Connectors

Contacts:: Phosphor Bronze plated Ni/Au  
 Molding:: PBT Glass Filled, Black  
 Shield:: Brass plated Sn.

Coxial Connectors

BNC(f) to IEC169 and Body Brass, plated Cu/Ni 5bad  
 CuNi2/Sn5  
 Pin - two leaf, Beryllium Cu, Plated Cu/Ni5/Au1.25  
 Insulation - Teflon  
 Meeting cycles - 500 min

Operating conditions

Material Impedance - 75Ω Unbalanced Coaxial to 120E Bal Twisted Pair  
 Bit rate - 2 Mbits (E1) and (E2) per ITUU-TG.703 Line Card  
 Signal Level - 2.37V Nominal peak at Coaxial end per G.703  
 Working Temperature - 30° C to 75 C°

  
**SYNERGY TELECOM (P) LTD.**  
 13-15, RPS Flats, E-Block, Vasant Puri, New Delhi - 110 018 (INDIA)  
 Phone: +91-11-28533349 Fax: +91-11-28531435 Mobile: +91-981038894  
 Email: prodeep@rfconnectorhouse.com, MSN: prodeepagrowal@synergy@hotmail.com  
 PRINCIPAL SITE: <http://www.vinncom.info> Skype Account: prodeepag  
 My trademanager ID: synergytelecom | [www.rfconnectors.info](http://www.rfconnectors.info)

**pdfMachine - is a pdf writer that produces quality PDF files with ease!**  
**Get yours now!**  
 "Thank you very much! I can use Acrobat Distiller or the Acrobat PDFWriter but I consider your product a lot easier to use and much preferable to Adobe's" A.Sarras - USA