




SL/NO	NAME	DESCRIPTION	IMAGE
	JAMMER MODULAR 420-470MHz	Frequency: 420-470MHz Power supply DC 24-28V Output power(± 0.5 dBm) 50dBm Output Power:95-100w Operating Temperature: $-20^{\circ}\text{C} \sim 65^{\circ}\text{C}$ RF PORT: Output: N-female Shell Size: 177*102*27 mm, Net Weight: 0.9kg Control Voltage 28V	
2	JAMMER MODULAR 860-930MHz	Frequency: 860-930MHz Power supply DC 24-28V Output power(± 0.5 dBm)50dBm Output Power:95-100w Operating Temperature: $-20^{\circ}\text{C} \sim 65^{\circ}\text{C}$ RF PORT: Output: N-female Shell Size: 177*102*27 mm, Net Weight: 0.9kg Control Voltage 28V	
3	JAMMER MODULAR 1170-1280MHz	Frequency: 1170-1280MHz Power supply DC 24-28V Output power(± 0.5 dBm)50dBm Output Power:95-100w Operating Temperature: $-20^{\circ}\text{C} \sim 65^{\circ}\text{C}$ RF PORT: Output: N-female Shell Size: 177*102*27 mm, Net Weight: 0.9kg Control Voltage 28V	
4	JAMMER MODULAR 1560-1620MHz	Frequency: 1560-1620MHz Power supply DC 24-28V Output power(± 0.5 dBm)50dBm Output Power:95-100w Operating Temperature: $-20^{\circ}\text{C} \sim 65^{\circ}\text{C}$ RF PORT: Output: N-female Shell Size: 177*102*27 mm Net Weight: 0.9kg Control Voltage 28V	

WZ-47, BASEMENT, BUDDHELLA VILAGE VIKAS PURI NEW DELHI - 110018

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN

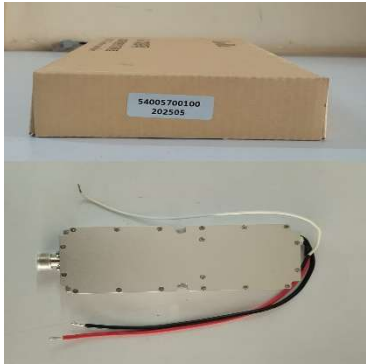

5	JAMMER MODULAR 2400-2500MHz	Frequency: 2400-2500MHz Power supply DC 24-28V Output power(± 0.5 dBm)50dBm Output Power:95-100w Operating Temperature: -20°C~65°C RF PORT: Output: N-female Shell Size: 177*102*27 mm Net Weight: 0.9kg Control Voltage 28V	
6	JAMMER MODULAR 2400-2500MHz	Frequency: 5100-5300MHz Power supply: DC 24-28V Output power(± 0.5 dBm)51dBm Output Power:95-100w Operating Temperature: -20°C~65°C RF PORT: Output: N Shell Size: 170*60*24mm Net Weight:0.489 kg Control Voltage 28V	
7	JAMMER MODULAR 5400-5700MHz	Frequency: 5400-5700MHz Power supply: DC 24-28V Output power(± 0.5 dBm)51dBm Output Power:95-100w Operating Temperature: -20°C~65°C RF PORT: Output: N Shell Size: 170*60*24mm Net Weight:0.489 kg Control Voltage 28V	
8	JAMMER MODULAR 5700-5900MHz	Frequency: 5700-5900MHz Power supply: DC 24-28V Output power(± 0.5 dBm)51dBm Output Power:95-100w Operating Temperature: -20°C~65°C RF PORT: Output: N Shell Size: 170*60*24mm Net Weight:0.489 kg Control Voltage 28V	

WZ-47, BASEMENT, BUDDHELLA VILAGE VIKAS PURI NEW DELHI - 110018

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN