


Synergy Telecom P Ltd.

BNC F TO SMA M ADAPTOR

Part no-ST01BSFM006

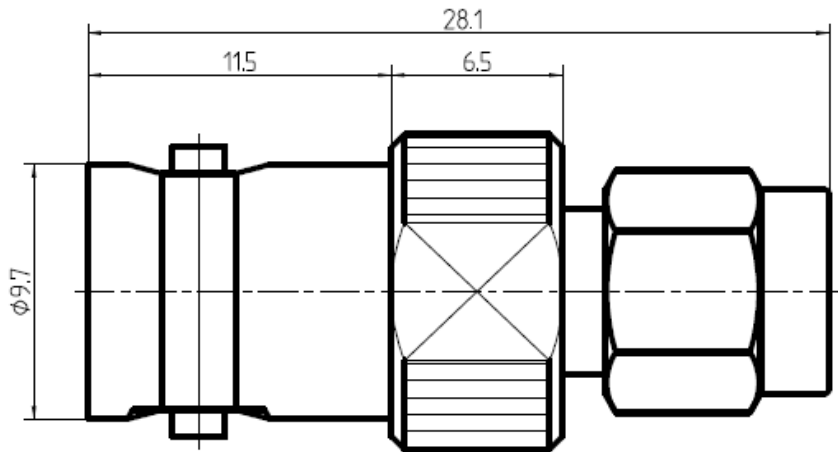

Electrical:

| | |
|--------------------------|-----------------------|
| Characteristic Impedance | 50 ohm |
| Frequency Range | DC-4 GHz |
| VSWR | ≤ 1.20 @DC-4 GHz |
| Insertion Loss | ≤ 0.10 dB |

Mechanical:

| | |
|------------|--------------------------|
| Durability | Mating Cycles ≥ 500 |
|------------|--------------------------|

Material and Plating:

| | Material | Plating |
|------------------|-----------------|---------|
| Body | Brass | Ni |
| Insulator | PTFE(Teflon) | - |
| Center conductor | Phosphor Bronze | Gold |

WZ-47 BUDHELLA VILLAGE ,VIKASPURI NEW DELHI-110018
Phone: 011-28533349, Mob: 9810138894/9212558066, Fax: 011-28533349
Email:- info@rfconnector.in, Website:- www.rfconnector.in

Synergy Telecom P Ltd.

Environmental:

Operating Temperature Range

-40°C ~ +85°C

RoHs

Compliant

Weatherproof Rate

IP 67

WZ-47 BUDHELLA VILLAGE ,VIKASPURI NEW DELHI-110018

Phone: 011-28533349, Mob: 9810138894/9212558066, Fax: 011-28533349

Email:- info@rfconnector.in, Website:- www.rfconnector.in