




# DIN CABLE LUG

**AUS**

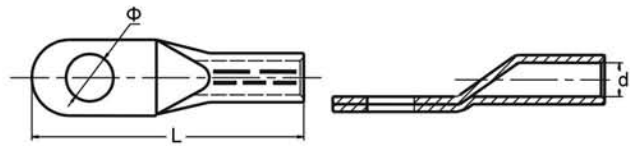

Material: E-Cu  
 Surface treatment: Tin-plated mini 8 microns  
 Product Property: It is used to connect the copper conductor end.  
 Application up to 33kv. It is in accordance with DIN46235 with markings for correct crimping. And its type test is follow IEC 61238-1.

Type	Dimensions(mm)		
	L	d	Φ
AUS6-5	30.5	3.8	5.3
AUS6-6	31.5	3.8	6.4
AUS6-8	34	3.8	8.4
AUS10-5	34	4.5	5.3
AUS10-6	34.5	4.5	6.4
AUS10-8	37	4.5	8.4
AUS16-6	43.5	5.5	6.4
AUS16-8	46	5.5	8.4
AUS16-10	48	5.5	10.5
AUS16-12	49	5.5	13
AUS25-6	45.5	7	6.4
AUS25-8	48	7	8.4
AUS25-10	50	7	10.5
AUS25-12	51	7	13
AUS35-6	49.5	8.4	6.4
AUS35-8	52	8.4	8.4
AUS35-10	54	8.4	10.5
AUS35-12	55	8.4	13
AUS35-14	56.5	8.2	15
AUS50-8	62	10	8.4
AUS50-10	64	10	10.5
AUS50-12	65	10	13
AUS50-14	66.5	10	15
AUS50-16	68	10	17
AUS70-8	65	11.5	8.4
AUS70-10	67	11.5	10.5
AUS70-12	68	11.5	13
AUS70-14	69.5	11.5	15
AUS70-16	71	11.5	17
AUS95-8	77	13.5	8.4
AUS95-10	77	13.5	10.5
AUS95-12	78	13.5	13
AUS95-14	79.5	13.5	15
AUS95-16	81	13.5	17

Type	Dimensions(mm)		
	L	d	Φ
AUS120-10	85	15.5	10.5
AUS120-12	86	15.5	13
AUS120-14	88	15.5	15
AUS120-16	89	15.5	17
AUS120-20	91	15.5	21
AUS150-10	93	17	10.5
AUS150-12	94	17	13
AUS150-14	97	17	15
AUS150-16	97	17	17
AUS150-20	99	17	21
AUS185-10	97	19	10.5
AUS185-12	98	19	13
AUS185-14	101	19	15
AUS185-16	101	19	17
AUS185-20	103	19	21
AUS240-12	108	21.5	13
AUS240-14	111	21.5	15
AUS240-16	111	21.5	17
AUS240-20	113	21.5	21
AUS300-14	119	24.5	15
AUS300-16	119	24.5	17
AUS300-20	122	24.5	21
AUS400-14	140	27.5	15
AUS400-16	140	27.5	17
AUS400-20	140	27.5	21
AUS500-16	150	31	17
AUS500-20	150	31	21
AUS630-16	160	34.5	17
AUS630-20	160	34.5	21
AUS800-16	195	40	17
AUS800-20	195	40	21
AUS1000-16	195	44	17
AUS1000-20	195	44	21