




BMA For RG316 Cable :-

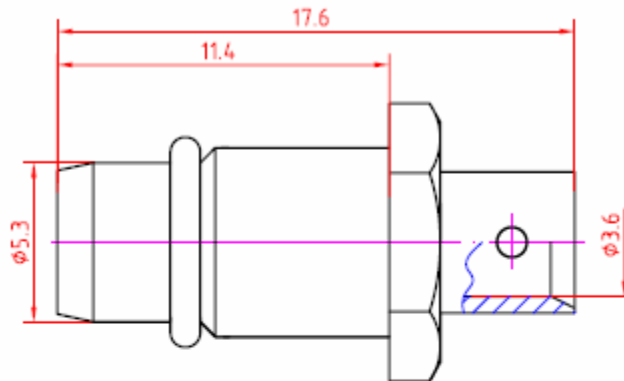

| | | |
|---------------------------------|---------------------------------|----------------|
| Electrical | | |
| Characteristic impedance | | 50 ohm |
| Frequency range | | DC-3GHz |
| VSWR | | ≤1.1 |
| Contact resistance | inner conductor: | < 1.0mΩ |
| | outer conductor: | < 0.25 mΩ |
| Dielectric withstanding voltage | > 2500V RMS, 50Hz, at sea level | |
| Dielectric resistance | > 5000MΩ | |
| Mechanical | | |
| Mating cycles | | > 500 |
| Material and plating | | |
| | Material | plating |
| Body | Brass | Gold |
| Insulator | Teflon | - |
| Center conductor | Brass | Gold |
| Coupling nut | Brass | |
| Environmental | | |
| Temperature range | -40°C ~ +85°C | |
| Drafted by: | Approved by: | |


SYNERGY TELECOM (P) LTD.
 13-15, RPS Flats, E-Block, Vihar Puri, New Delhi - 110 018 (INDIA)
 Phone: +91-11-28533349 Fax: +91-11-28531435 Mobile: +91-9810138894
 Email: pradeep@rfconnectorhouse.com, MSN: pradeepagrowal@synergy@hotmail.com
 PRINCIPAL SITE: http://www.vlncom.info Skype Account: pradeepag
 My trademarker ID: synergytelecom www.rfconnectors.info

pdfMachine
A pdf writer that produces quality PDF files with ease!
 Produce quality PDF files in seconds and preserve the integrity of your original documents. Compatible across nearly all Windows platforms, simply open the document you want to convert, click "print", select the "Broadgun pdfMachine printer" and that's it! Get yours now!