




**BMA Female RG316 Cable :-**

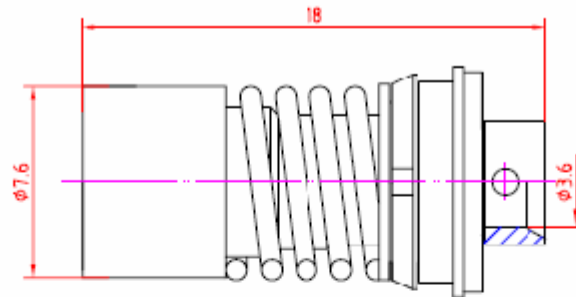

<b>Electrical</b>		
Characteristic impedance		50 ohm
Frequency range		DC-3GHz
VSWR		≤1.1
Contact resistance	inner conductor:	< 1.0mΩ
	outer conductor:	< 0.25 mΩ
Dielectric withstanding voltage		> 2500V RMS, 50Hz, at sea level
Dielectric resistance		> 5000MΩ
<b>Mechanical</b>		
Mating cycles		> 500
<b>Material and plating</b>		
	<b>Material</b>	<b>plating</b>
Body	Brass	Gold
Insulator	Teflon	-
Center conductor	Brass	Gold
Coupling nut	Brass	
<b>Environmental</b>		
Temperature range		-40°C ~ +85°C
<b>Drafted by:</b>		<b>Approved by:</b>

  
**SYNERGY TELECOM (P) LTD.**  
 13-15, RPS Flats, E-Block, Vihar Puri, New Delhi - 110 018 (INDIA)  
 Phone: +91-11-28533349 Fax: +91-11-28531435 Mobile: +91-9810138894  
 Email: praddeep@rfconnectorhouse.com, MSN: praddeepgrows@synergy@hotmail.com  
 PRINCIPAL SITE: <http://www.vinncom.info> Skype Account: praddeepg  
 My trademarker ID: synergytelecom [www.rfconnectors.info](http://www.rfconnectors.info)

**pdfMachine - is a pdf writer that produces quality PDF files with ease!**  
**Get yours now!**  
 "Thank you very much! I can use Acrobat Distiller or the Acrobat PDFWriter but I consider your product a lot easier to use and much preferable to Adobe's" A.Sarras - USA