


# Synergy Telecom P Ltd.

## BNC(M) R/A LMR-400 CRIMP:-

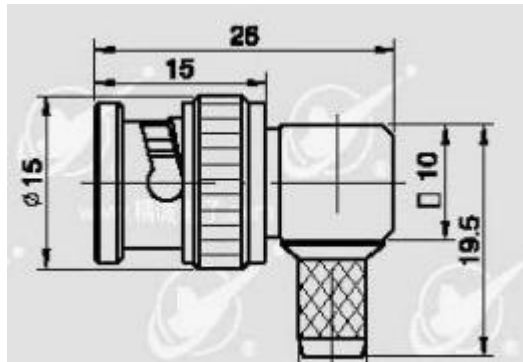

### Electrical Specification

Characteristic Impedance	50 ohm
Frequency Range	DC- 4 GHz
VSWR	<1.2
Contact Resistance	Inner Conductor : < 1.5 m $\Omega$ Outer Conductor : < 1.0 m $\Omega$
Dielectric withstanding Voltage	>2500V RMS, 50Hz, At sea Level
Dielectric Resistance	> 5000 M $\Omega$
RoHS	Compliance

### Mechanical

Durability Mating	cycle $\geq$ 500
-------------------	------------------

### Material Specification

	Material	Plating
Body	Brass	White Bronze
Insulator	Teflon/PTFE	
Center Conductor	Phosphor Copper	Gold(AU)
Ferrule	Annealed copper	Ni

### Environmental

Temperature Range	- 10°C – +55 °C
-------------------	-----------------