


Synergy Telecom P Ltd.

Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd

COAXIAL FIXED ATTENUATORS

Model SMA DC-18GHz 2 Watts

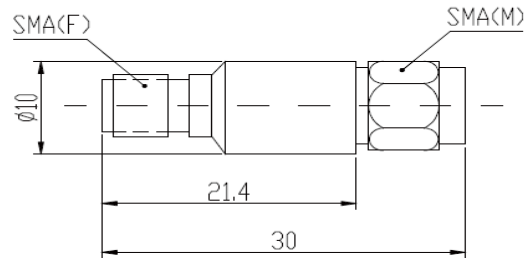

Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

SMA coaxial fixed attenuators' average power 2W, frequency range from DC-18GHz and feature wide frequency band, low VSWR, flatness attenuation value and excellent capacity in anti-pulse and anti-burnout etc.

MECHANICAL SPECIFICATIONS

Connectors	Stainless Steel
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	Stainless Steel
Temp Range	-55° C ~ +125° C
Dimensions	Φ10×30mm
Weight	10g

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range (GHz)	Attenuation Value & Accuracy (dB)				Max VSWR
		1-9	10	20	30	
SMA-XX-18	DC-18	±1.0	±1.0	±1.0	±1.0	1.35

Note: XX refer to attenuation value in dB

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 2W average to 25°C ambient temperature, derated linearly to 0.5W @ 125°C.

PEAK POWER: 0.5KW (5μs pulse width with 0.4% duty cycle)

CONNECTOR TYPE: SMA(M,F)

Notes:

1. Dimensions Tolerance ±2%
2. Custom designs available for other special attenuation value & accuracy.

13-15 RPS flats, E-block, VIKASपुरी, N Delhi-110018, India
 Phone-91 11 28533349, Mobile-91 98101 38894, Fax -91 11 2853 1435,
 E-mail : pradeep@rfconnectorhouse.com, Website : <http://www.rfconnector.info/>