

Synergy Telecom P Ltd.

Synergy Telecom (P) Ltd **2 WAY SMA MICROSTRIP SPLITTER 700-2700MHz** (P) Ltd

Synerg



Synerg

Synerg

Synerg

Synerg

Synerg

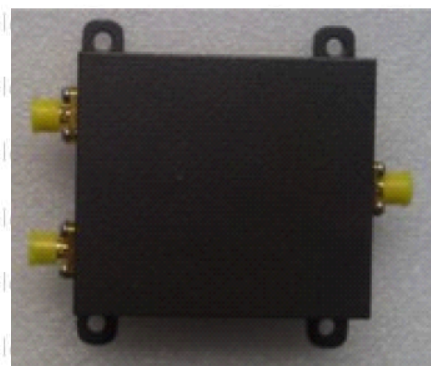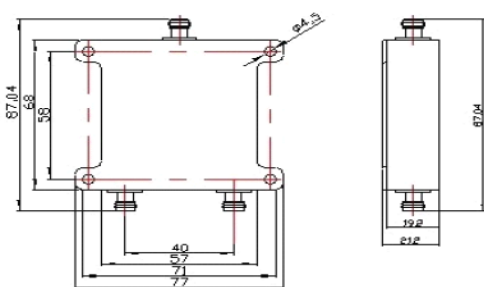

Electrical Specification

Characteristic Impedance	50 ohm
Frequency Range	700-3000Mhz
VSWR	≤ 1.40
Insertion Loss	≤ 4
Amplitude Balance (dB)	≤ 0.3
Isolation (dB)	≥ 16
Power	50watt
Connector	SMA-F
RoHS	Compliance

Features:

- Wide Band
- High Power Handling
- Low Insertion Loss
- Custom Design Available

Environmental

Temperature Range - 30°C – +75 °C

13-15 RPS flats, E-block, Vikaspuri, N Delhi-110018, India
Phone-91 11 28533349, Mobile-91 98101 38894, Fax -91 11 2853 1435,
E-mail : pradeep@rfconnectorhouse.com, Website : <http://www.rfconnector.info/>