
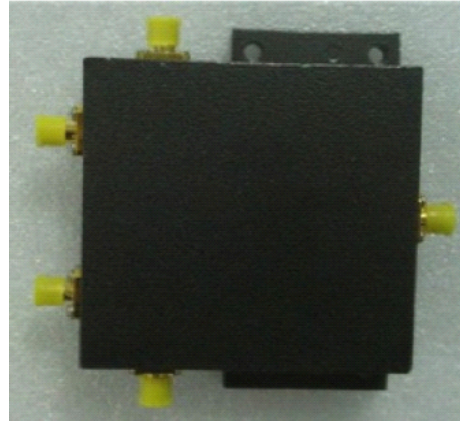


Synergy Telecom P Ltd.

4 WAY SMA MICROSTRIP SPLITTER 800-2500MHz

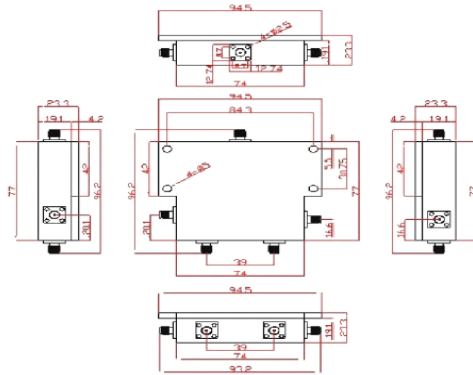

Electrical Specification

Characteristic Impedance	50 ohm
Frequency Range	800-2500Mhz
VSWR	≤ 1.13
Insertion Loss	≤ 6.5
Amplitudine Balance (dB)	≤ 0.3
Isolation (dB)	≥ 20
Power	50watt
Connector	SMA-F
RoHS	Compliance

Features:

- Wide Band
- High Power Handling
- Low Insertion Loss
- Custom Design Available

Environmental

Temperature Range - 30°C – +75 °C

WZ-47 BUDHELLA VILLAGE, VIKASPURI, NEW DELHI – 110018
PHONE: 011-28533349, MOB: 9810138894/9212558066, FAX: 011-28533349
EMAIL: info@rfconnector.in, WEBSITE: <http://rfconnector.in/>