


SYNERGY TELECOM P. LTD

ATT 20DB 2W N M/F 6GHZ

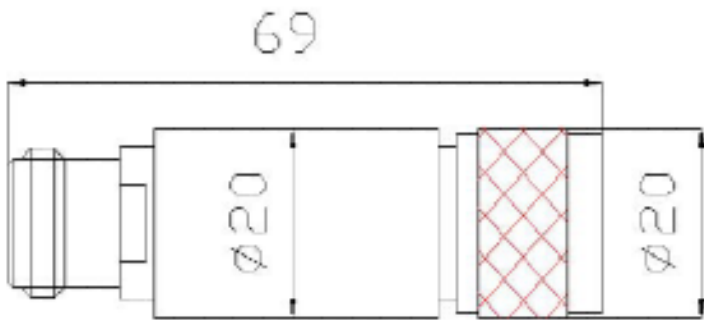

Frequency(GHz)	DC-6
Impedence(Ohm)	50
VSWR	≤1.25:1
Application	Indoor
Attenuation(dB)	20
Tolerance(dB)	±1.2
Interface	N-male to N-female
Temperature(°C)	-40 ~ + 80
IP Grade	IP60
Color	Black
Average Power (W)	2W

WZ-47 BUDHELLA VILLAGE, VIKASPURI, NEW DELHI – 110018

PHONE: 011-28533349, MOB: 9810138894/9212558066, FAX: 011-28533349

EMAIL: info@rfconnector.in, WEBSITE: <http://rfconnector.in/>