




2 BNC Female to RJ 45 Converter :-

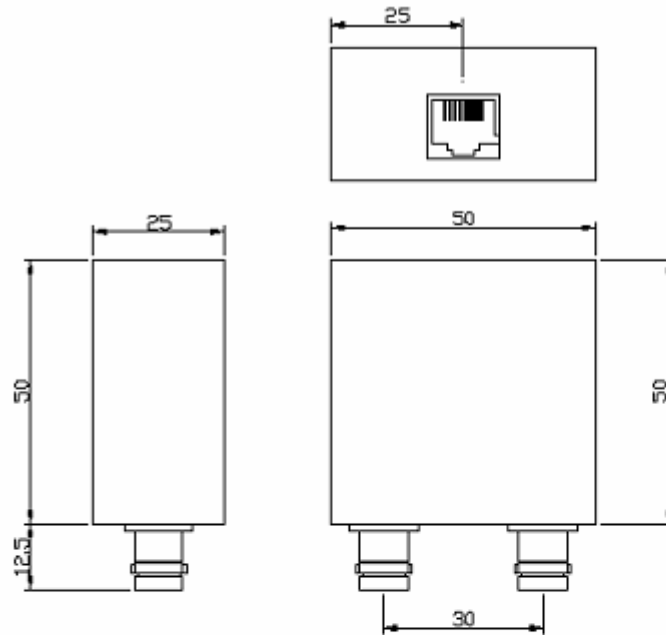

RJ45 Connectors

Contacts:: Phosphor Bronze plated Ni/Au
 Molding:: PBT Glass Filled, Black
 Shield:: Brass plated Sn.

Coxial Connectors

BNC(f) to IEC169 and Body Brass, plated Cu/Ni 5bad
 CuNi2/Sn5
 Pin - two leaf, Beryllium Cu, Plated Cu/Ni5/Au1.25
 Insulation - Teflon
 Meeting cycles - 500 min

Operating conditions

Material Impedance - 75Ω Unbalanced Coaxial to 120E Bal Twisted Pair
 Bit rate - 2 Mbits (E1) and (E2) per ITUU-TG.703 Line Card
 Signal Level - 2.37V Nominal peak at Coaxial end per G.703
 Working Temperature - 30° C to 75 C°



SYNERGY TELECOM (P) LTD.

13-15, RPS Flats, E-Block, Vasant Vihar, New Delhi - 110 018 (INDIA)
 Phone: +91-11-28533349 Fax: +91-11-28531435 Mobile: +91-981038894
 Email: pradeep@rfconnectorhouse.com, MSN: pradeepgrows@synergy@hotmail.com
 PRINCIPAL SITE: <http://www.vinncom.info> Skype Account: pradeepag
 My trademanager ID: synergytelecom | www.rfconnectors.info

pdfMachine - is a pdf writer that produces quality PDF files with ease!

Get yours now!

"Thank you very much! I can use Acrobat Distiller or the Acrobat PDFWriter but I consider your product a lot easier to use and much preferable to Adobe's" A.Sarras - USA