




2BNC F To Screw Type Balun Metal Box

BALUN
PRBL RJ BNC2

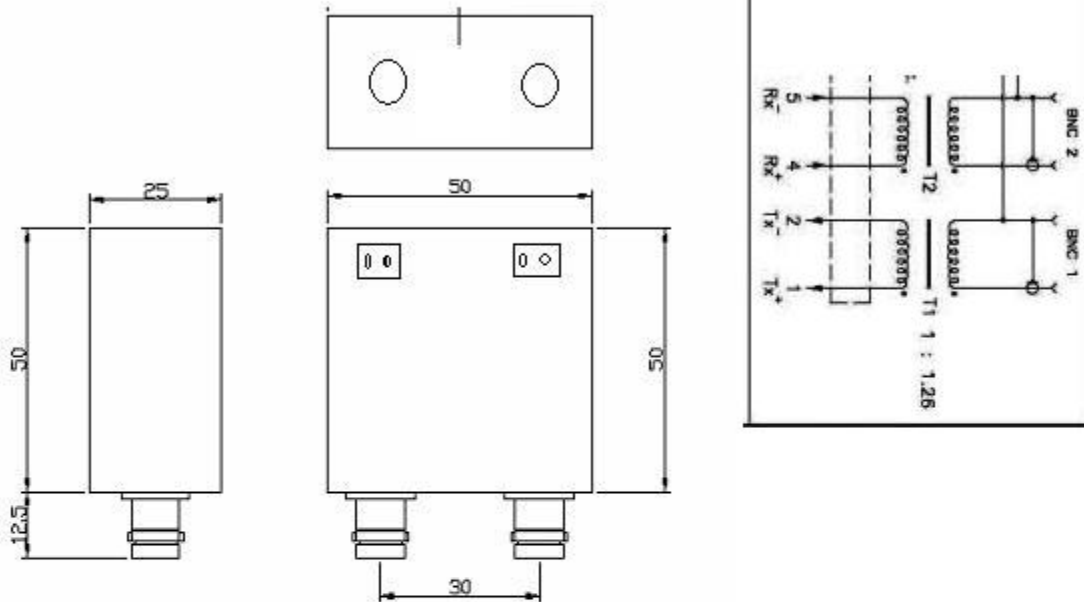

RJ45 Connectors

Contacts:: Phosphor Bronze plated Ni/Au
Molding:: PBT Glass Filled, Black
Shield:: Brass plated Sn.

Coxial Connectors

BNC(f) to IEC169 and Body Brass, plated Cu/Ni 5µd
CuNi2/Sn5
Pin - two leaf, Beryllium Cu, Plated Cu/Ni5/Au1.25
Insulation - Teflon
Meeting cycles - 500 min

Operating conditions

Material Impedance - 75Ω Unbalanced Coaxial to 120E Bal Twisted Pair
Bit rate - 2 Mbits (E1) and (E2) per ITU-T G.703 Line Card
Signal Level - 2.37W Nominal peak at Coaxial end per G.703
Working Temperature - 30° C to 75 C°



SYNERGY TELECOM (P) LTD.

13-15, RP5 Flats, E-Block, Visco Park, New Delhi - 110 018 (INDIA)
Phone: +91-11-28533549 Fax: +91-11-28535830 Mobile: +91-9810388994
Email: pradeep@connectorhouse.com, MSK.pradeep@synergyphoto.com
PRINCIPAL SITE: <http://www.stcom.net> Skype Account: pradeepg
My trademark ID: synergytelecom www.connectorhouse.com