



Coupler :-

Electrical Specification


| | |
|----------------------|-------------|
| Operating Frequency: | 800~2500MHZ |
| Insertion Loss: | 0.15dB /Max |
| Coupling(dB) | 6/10/15/20 |
| V.S.W.R | 1:1.2/MAX |
| Directivity | 20dB |
| Amplitude Unbalance | ---- |
| Phase Unbalance | ---- |
| Input Power | 20-300Watt |
| Impedence | 50Ω/Nominal |

Physical Specification

| | |
|------------------------|---------------|
| Operating Temperature: | -40°C ~ +80°C |
| Dimension (W*D*H/mm) | ----- |
| Weight (gram) | 240g |
| Connector-input | N Female |
| Connector-output | N Female |



[Product image]

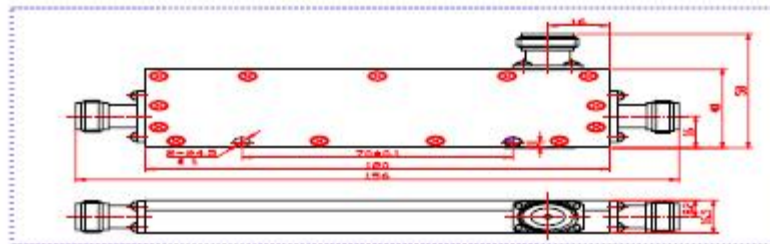

[Drawing image]

Plating

| | |
|-------------------|---------------|
| Inner conductor | Silver Plated |
| Outer Conductor | Nickel Plated |
| Other Metal Parts | Black Plated |

Material Specification

| | |
|-----------------------------|-----------------------------------|
| Inner Conductor | Beryllium Copper or Spring Bronze |
| Other Metal Parts (Housing) | Aluminum |



SYNERGY TELECOM (P) LTD.

13-15, RP5 Flat, E-Block, Vihar Puri, New Delhi - 110 018 (INDIA)
 Phone: +91-11-28533349, Fax: +91-11-28531435, Mobile: +91-9810138294
 Email: pradeep@rfconnectorhouse.com, MSN: pradeepagrowalsynergy@hotmail.com
 PRINCIPAL SITE: <http://www.vincom.info> Skype Account: pradeepag
 My trademanager ID: synergytelecom www.rfconnectors.info

pdfMachine

Is a pdf writer that produces quality PDF files with ease!

Produce quality PDF files in seconds and preserve the integrity of your original documents. Compatible across nearly all Windows platforms, if you can print from a windows application you can use pdfMachine.

Get yours now!