

Standard Package

www.fiberfox.co.kr

Mini
4S

4 Motors
Active Alignment Splicer



Specifications


Splicing Method	Active Alignment DAA(Digitalized Active Alignment)
Average Loss	SM(0.03dB) / MM(0.01dB) / DS(0.05dB) / NZDS(0.05dB) / G.657(0.03dB)
Return Loss	>>60dB
Splice Time	12s average SM / SM 7s Quick mode
Electrode Lifespan	>3,500 arcs
Applicable Fiber	SM(ITU-T G.652, MM(ITU-T G.651), DS(ITU-T G.653), NZDS(ITU-T G.655), IT-G657A, IT-G657B 0.25mm, 0.9mm, 2.0mm, 2.4mm, 3.0mm, FLAT(indoor cable)
Cleaved Length	Coating Diameter < 0.25mm = 5-16mm, Coating Diameter > 0.25mm = 8-16mm minimum
Coating Diameter	100-1000um
Cladding Diameter	80-150um
Heating Programs	Factory installed mode : 3, User installable mode : 23
Heating Time	Typical 18s
Protection Sleeve	40mm, 60mm, SOC-3.0, SOC-0.9
Data Output	Micro HDMI-USB master device
Splice Programs	8 user modes, User installable mode : 70+
Splice Memory	Up to 2000 records
Battery	Typical 130 Cycles (Splice & Heat) / single battery <2 Batteries Standard>
Power Supply	AC 100-240V input or DC 9-14V
Monitor	Color 4.3" LCD monitor, with Touch Screen (Tempered Glass)
Cameras	2 CCD camera system
Magnification	XY : 150 times , X/Y : 300 times
Fiber Display	X/Y or XY, single X.Y
Weight	1.29Kg (without battery)
Size	124mm X 123mm X 130 mm
Wind Protection	The max wind speed 15m/s
Operating Environment	Elevation 0-5000 meters, -15~60°C, 0-95% relative humidity
Storage Condition	Temperature -40 to 80°C, 0-95% relative humidity, battery -20-30°C
Pull Test	1.96~2.25N (standard)



4 Motors
Active Alignment Splicer




Characteristic

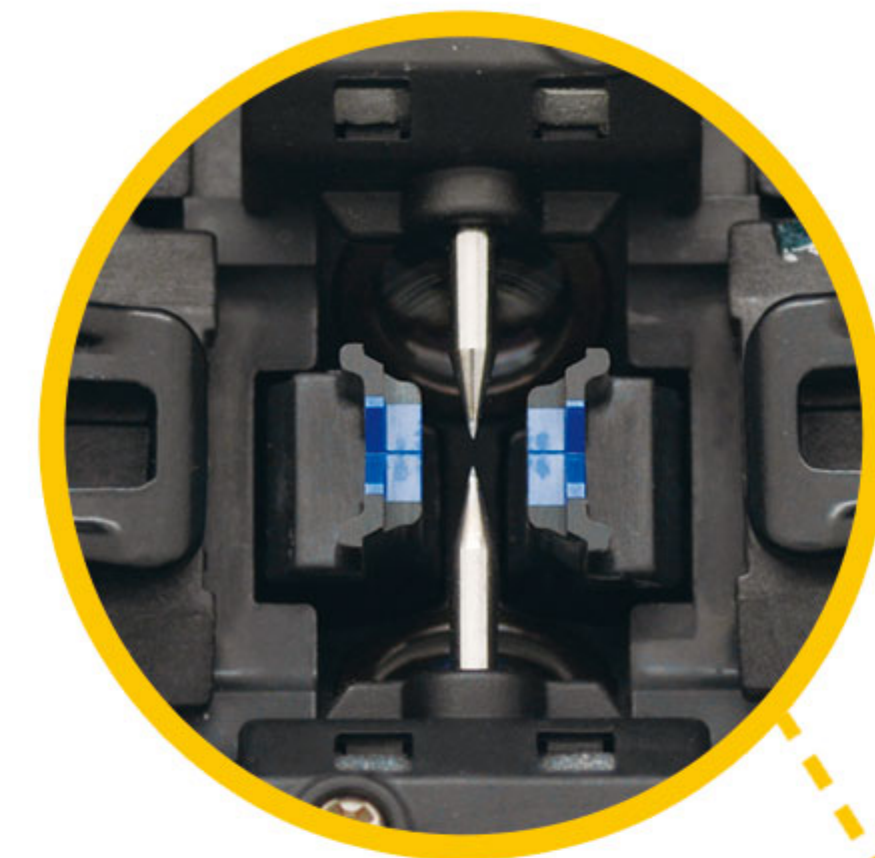


Applicable Cleaved Length
- Up to 5mm



Heating Time
- 18 sec <60mm sleeve>

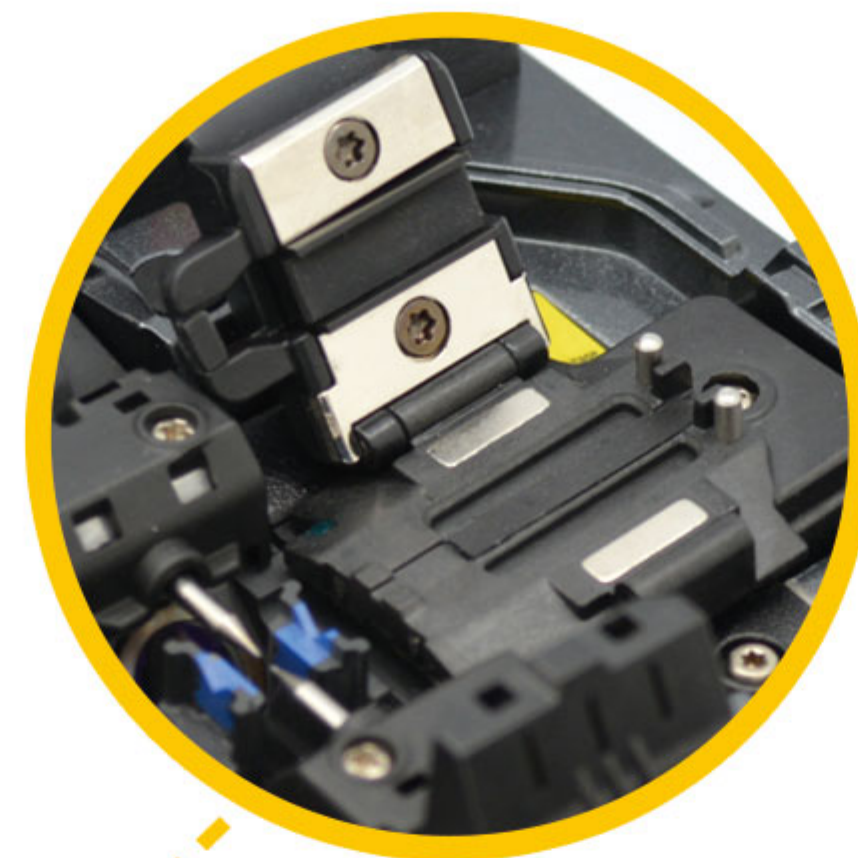

Universal Holder
- 250
- 900
- 2~3
- Indoor

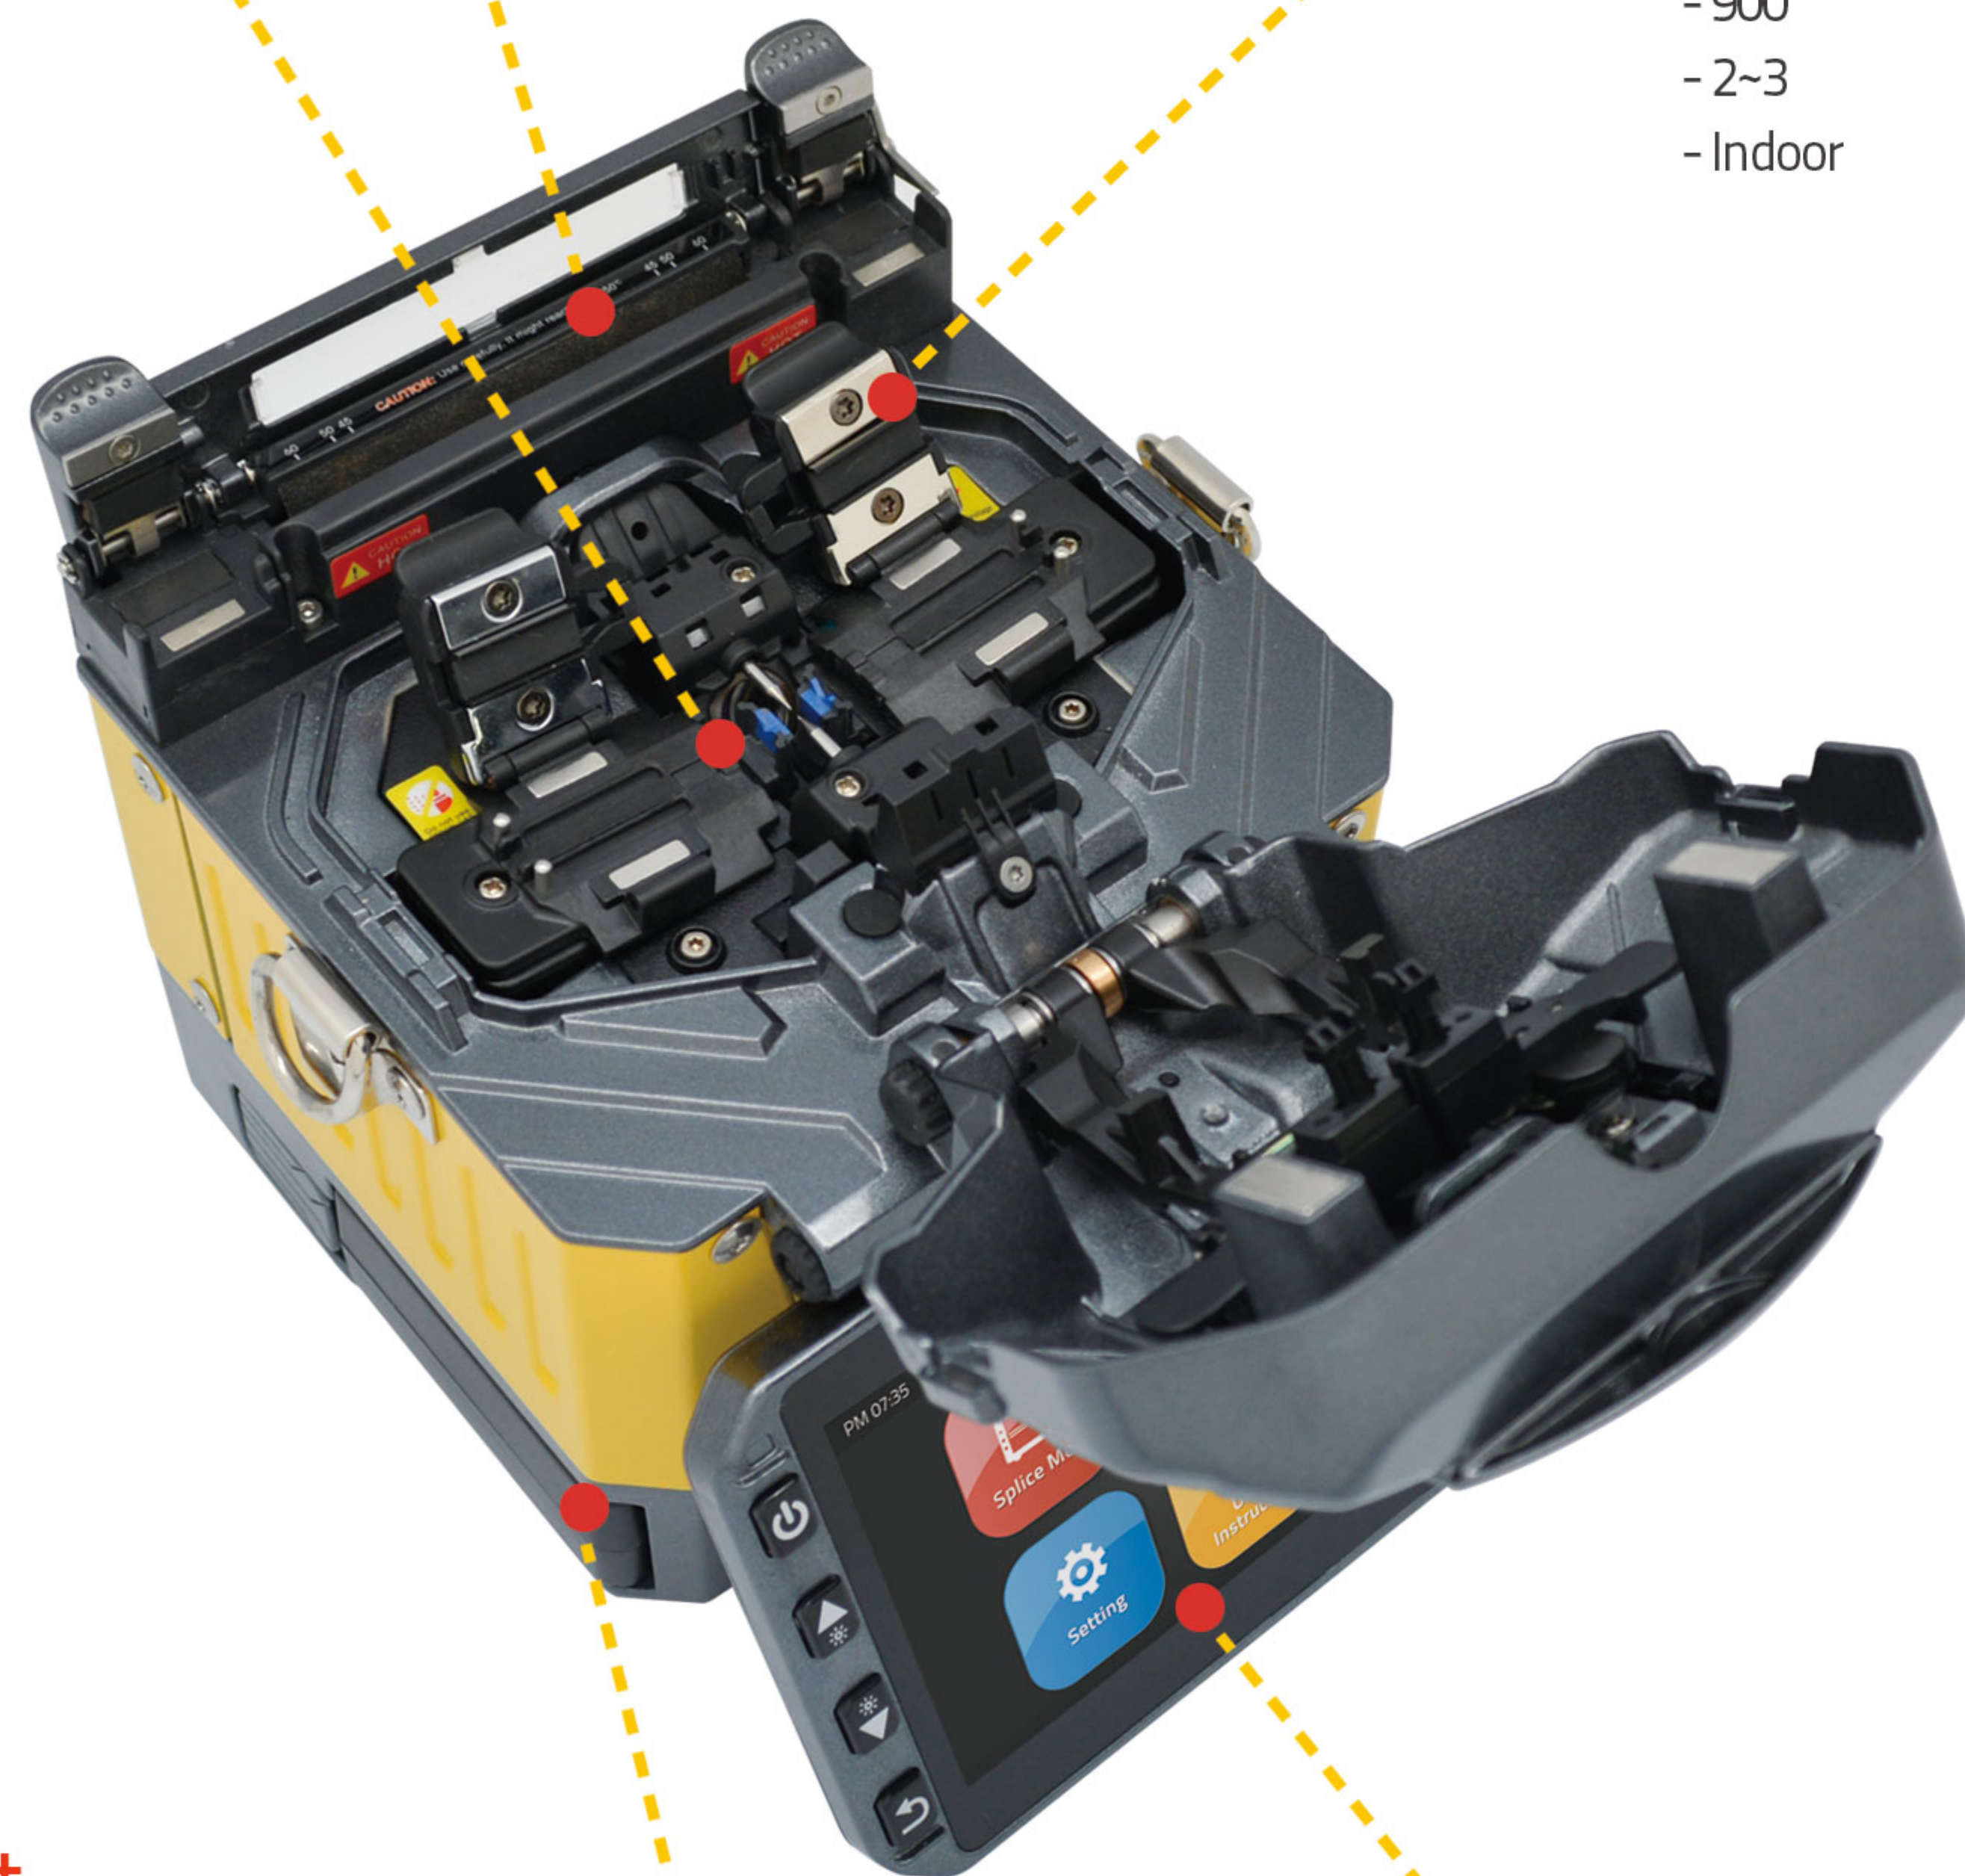

Mini 4S

1.29kg
(Without Battery)

122 x 124 x 131 mm

Option product



Work Table Bag



Two Batteries are Included in Standard Package
- 260 cycles (splicing & heating) with Two Batteries





Full Touch Screen
- GUI Interface
- Tempered Glass

01

Performance

Perfect performance
under any environmental conditions

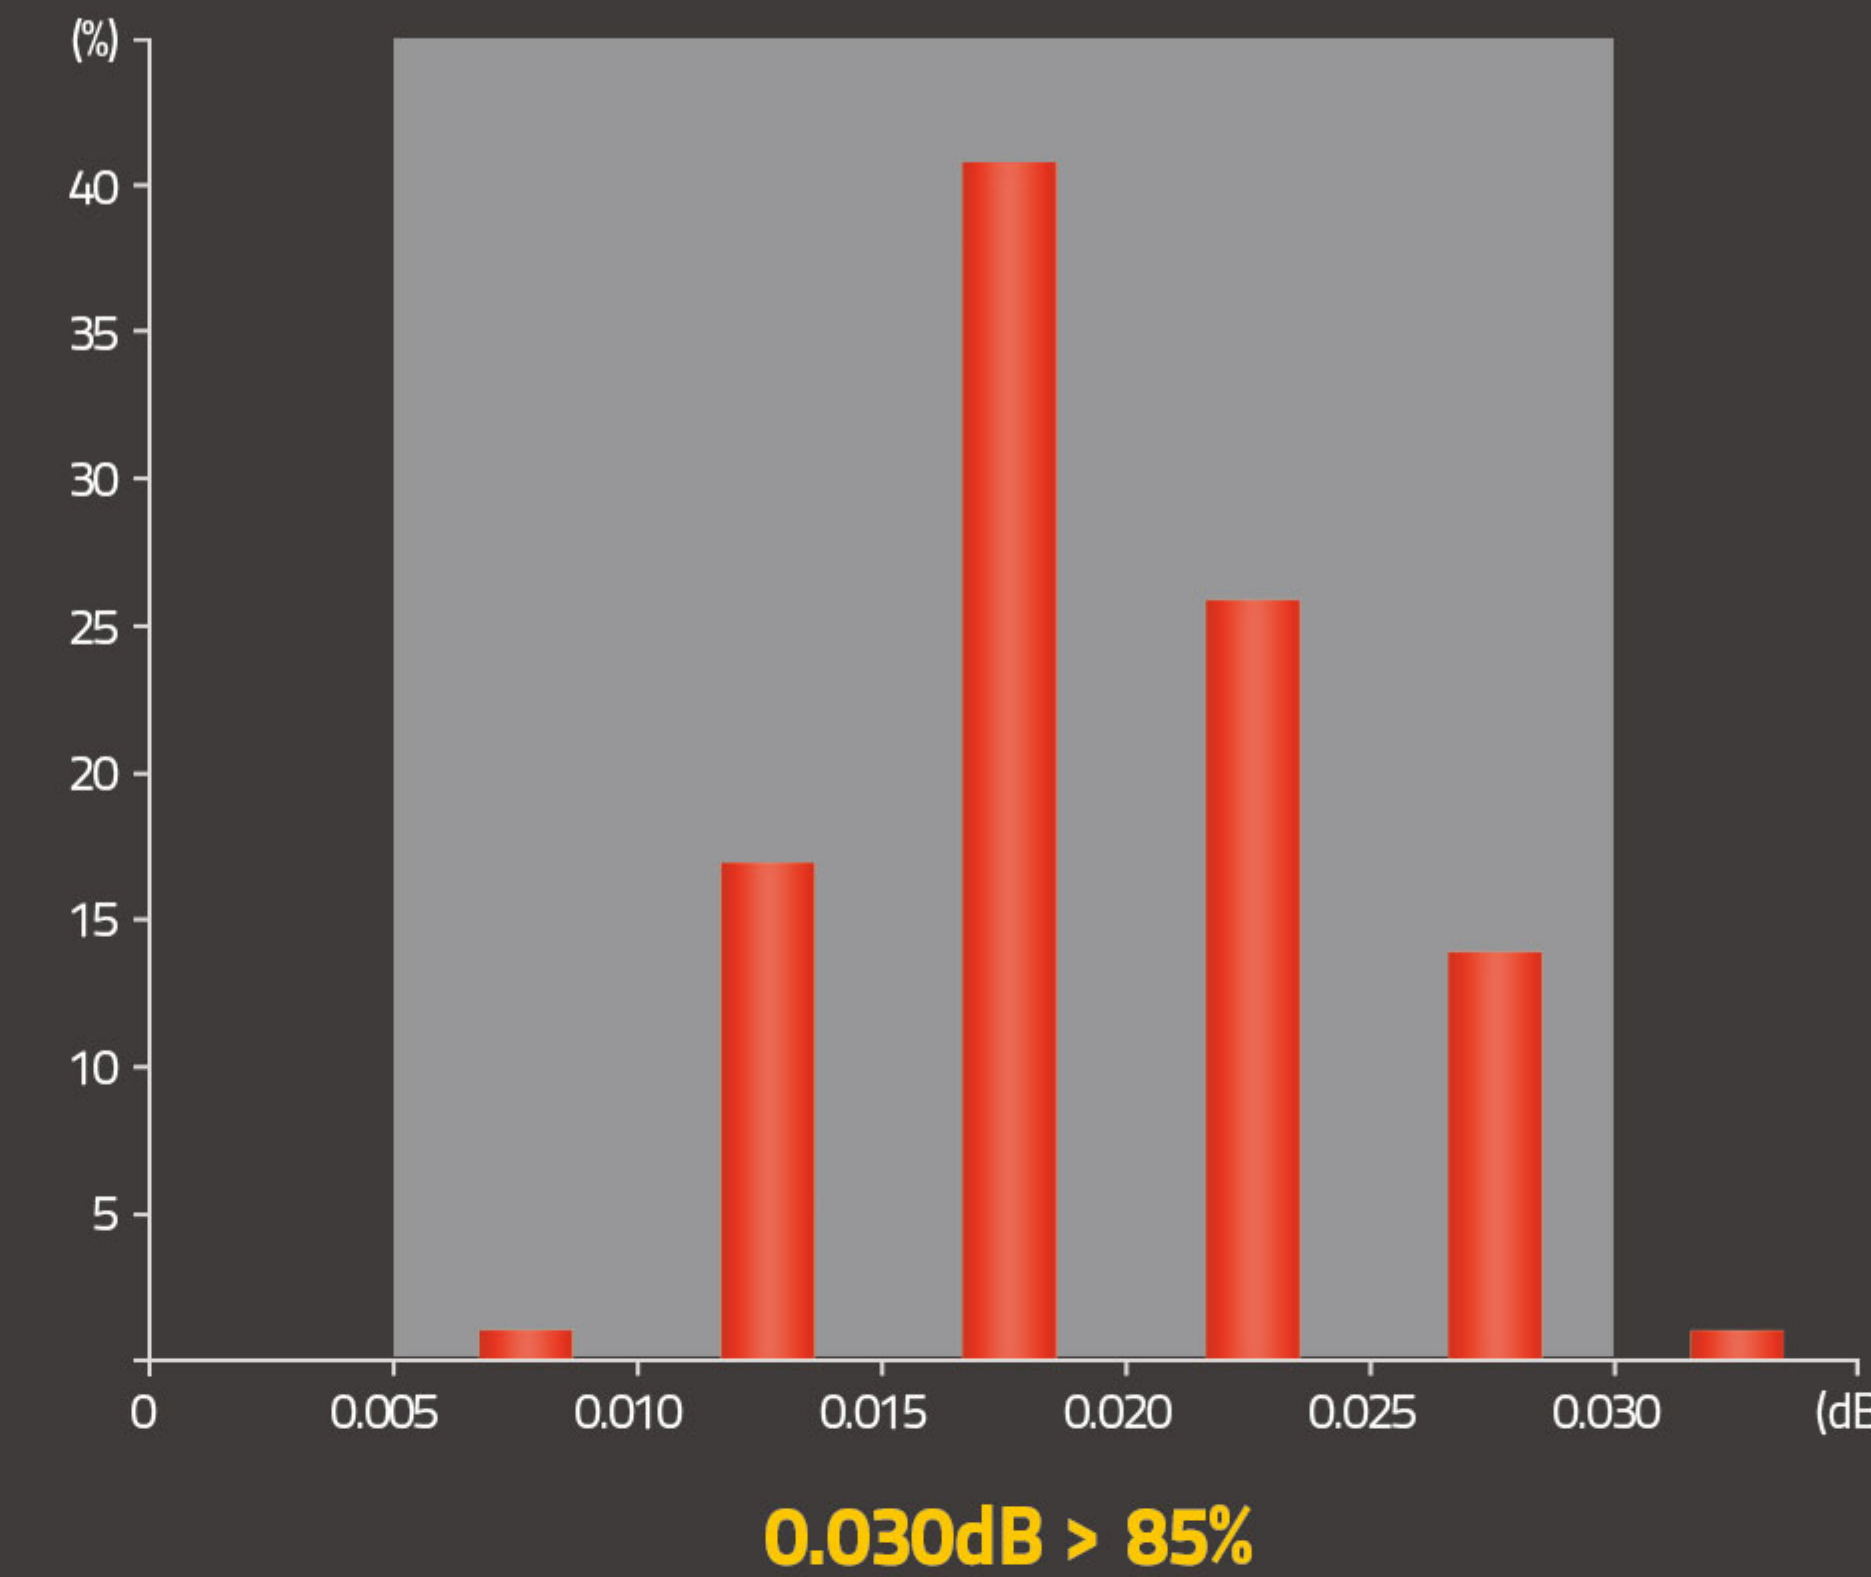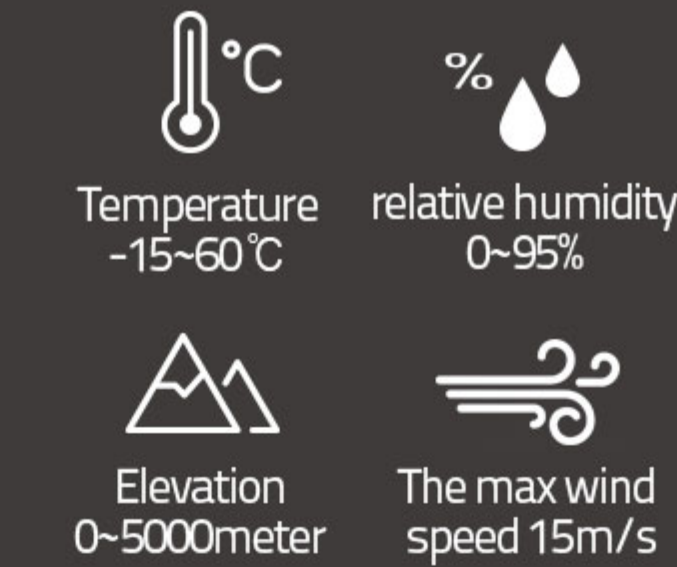

02

SOC
Compatible



03

Durability



Dustproof

Waterproof

04

FTTH
Solution

