


**Coaxial Slotted Section**

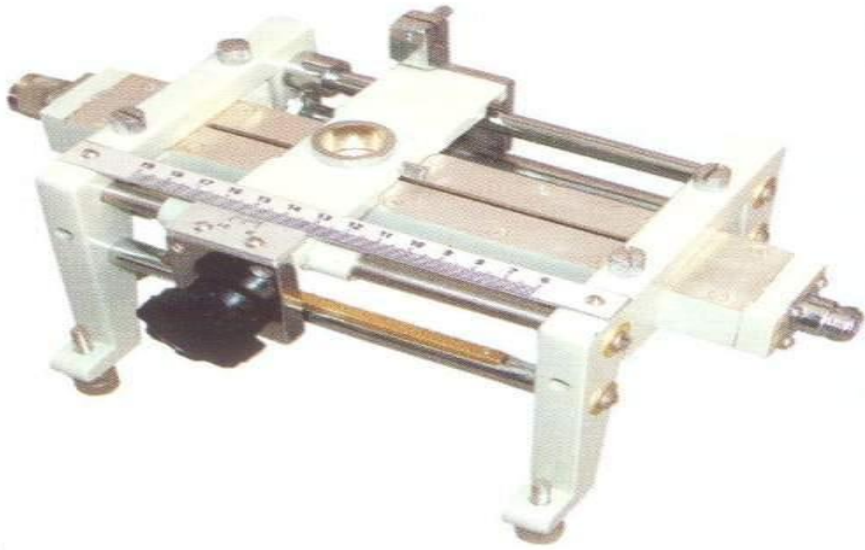

**Coaxial Slotted Section**

**Model 6051 Coaxial Slotted Line consists of Two parallel planes-strips and a central conductor With N (M) connector on one end and N (F) Connector on the other end. It is designed to have Low residual VSWR. The probe carriage with vernier-scale is provided with coaxial slotted line.**

Frequency Range	Residual VSWR	Connectors
2.0-18.0 GHz	1.02 (upto 10.0 Ghz) 1.03 (10-18 GHz)	N-type

Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd  
 Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd  
 Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd  
 Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd  
 Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd