


Synergy Telecom P Ltd.

BNC M TO SMA M ADAPTOR

Part no-ST01BSMM006

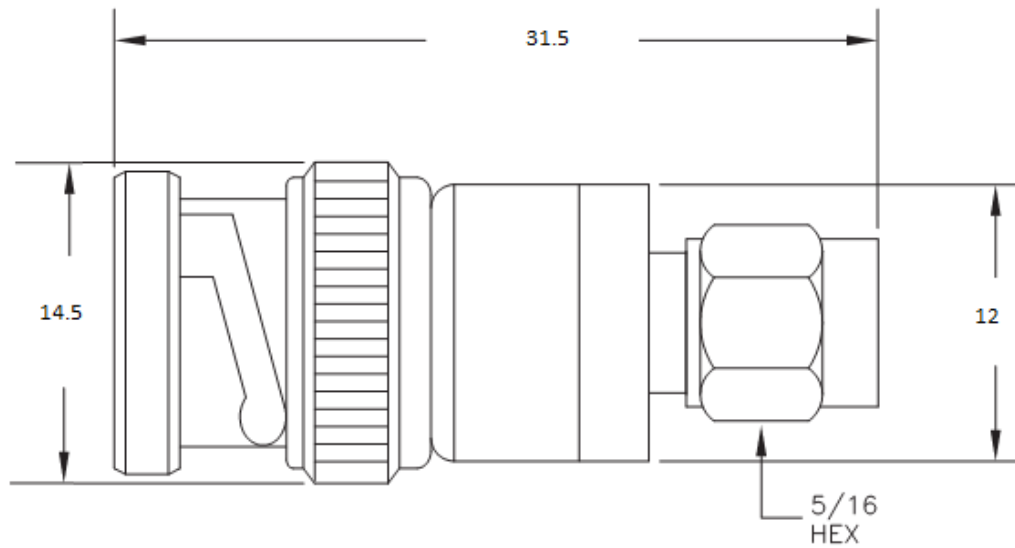

Electrical:

Characteristic Impedance	50 ohm
Frequency Range	DC-4 GHz
VSWR	≤ 1.20 @DC-4 GHz
Insertion Loss	≤ 0.10 dB

Mechanical:

Durability	Mating Cycles ≥ 500
------------	--------------------------

Material and Plating:

	Material	Plating
Body	Brass	Ni
Insulator	PTFE(Teflon)	-
Center conductor	Phosphor Bronze	Gold

WZ-47 BUDHELLA VILLAGE ,VIKASPURI NEW DELHI-110018

Phone: 011-28533349, Mob: 9810138894/9212558066, Fax: 011-28533349

Email:- info@rfconnector.in, Website:- www.rfconnector.in

Synergy Telecom P Ltd.

Environmental:

Operating Temperature Range

-40°C ~ +85°C

RoHs

Compliant

Weatherproof Rate

IP 67

WZ-47 BUDHELLA VILLAGE ,VIKASPURI NEW DELHI-110018

Phone: 011-28533349, Mob: 9810138894/9212558066, Fax: 011-28533349

Email:- info@rfconnector.in, Website:- www.rfconnector.in