


Synergy Telecom P Ltd.

MINI DIN M TO DIN F ADAPTOR

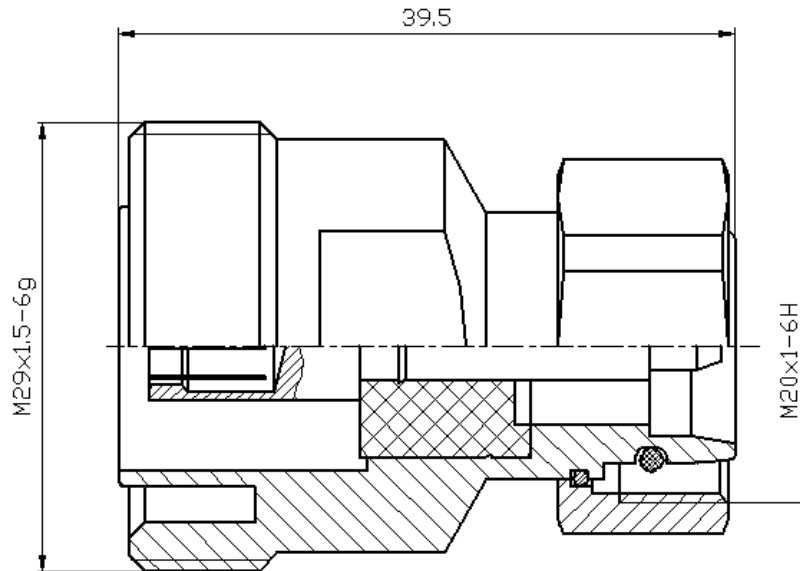

Electrical:

Characteristic Impedance	50 ohm
Frequency Range	DC-7.5 GHz
VSWR	$\leq 1.10 @ DC-3000MHz$
Insertion Loss	$\leq 0.05 dB \sqrt{f(GHz)}$ dB

Mechanical

Durability	Mating cycles $\geq 500/100$
------------	------------------------------

Material and Plating:

	Material	Plating
Body	Brass	Tri-metal
Insulator	PTFE(Teflon)	-
Center conductor	Phosphor bronze	Ag

Environmental:

Operating Temperature Range	-40°C ~ +85°C
-----------------------------	---------------

WZ-47 BUDHELLA VILLAGE ,VIKASPURI NEW DELHI-110018
Phone: 011-28533349, Mob: 9810138894/9212558066, Fax: 011-28533349
Email:- info@rfconnector.in, Website:- www.rfconnector.in

Synergy Telecom P Ltd.

RoHs
Weatherproof Rate

Compliant
IP 67

WZ-47 BUDHELLA VILLAGE ,VIKASPURI NEW DELHI-110018
Phone: 011-28533349, Mob: 9810138894/9212558066, Fax: 011-28533349
Email:- info@rfconnector.in, Website:- www.rfconnector.in