

N Type Connector Series

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-18GHz

VSWR: DC-18GHz... 1.15:1 (Max)

Durability: 500 Cycles

Operating Temperature: -60°C~+165°C


Interfaces: Per MIL-STD-348A

Materials/Finishes

Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI&PTFE

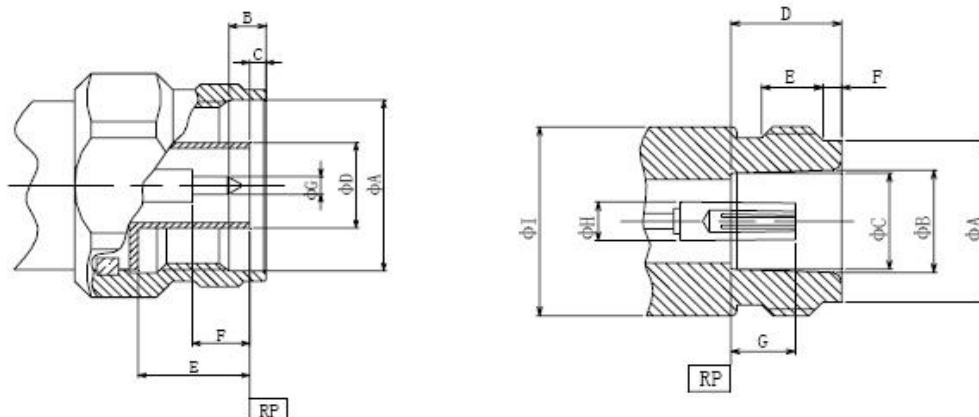

N Male (mm)			N Female (mm)		
LTR	MINIMUM	MAXIMUM	LTR	MINIMUM	MAXIMUM
A	15	17	A	13.4	13.6
B	3.3	3.5	B	8.5	8.7
C	1.3	1.55	C	8.05	8.086
D	8	8.035	D	8.88	9.16
E	10.1	10.3	E	4.9	5.1
F	5.36	5.46	F	1.4	1.6
G	1.62	1.65	G	5.16	5.26
			H	3.025	3.055
			I	15.75	15.88



SYNERGY TELECOM (P) LTD.

13-15, RPS Flats, E-Block, Vileca Puri, New Delhi - 110 018 (INDIA)
 Phone: +91-11-28533349 Fax: +91-11-28534435 Mobile: +91-9810138894
 Email: pradeep@rfconnectorhouse.com, MSN: pradeepgrows@synergy@hotmail.com
 PRINCIPAL SITE: <http://www.stncom.info> Skype Account: pradeepag
 My trademark ID: synergytelecom : www.rfconnectors.info


pdfMachine

A pdf writer that produces quality PDF files with ease!


Produce quality PDF files in seconds and preserve the integrity of your original documents. Compatible across nearly all Windows platforms, if you can print from a windows application you can use pdfMachine.

Get yours now!


N Series Field Replaceable Flange Connectors

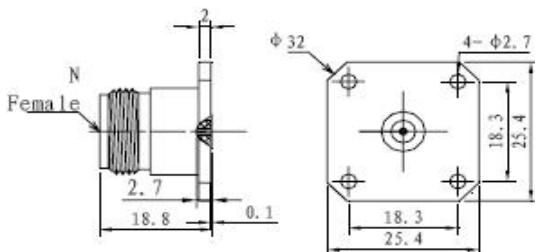


P/N	D
D340S18F01	0.018 inch/0.46mm
D340S20F01	0.020 inch/0.51mm
D340S36F01	0.036 inch/0.91mm

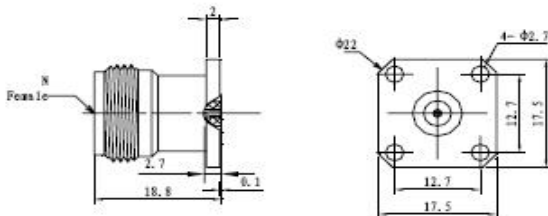

P/N	D
D340S18F02	0.018 inch/0.46mm
D340S20F02	0.020 inch/0.51mm
D340S36F02	0.036 inch/0.91mm

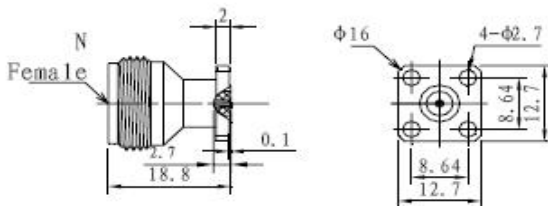

P/N	D
D340S18F03	0.018 inch/0.46mm
D340S20F03	0.020 inch/0.51mm
D340S36F03	0.036 inch/0.91mm

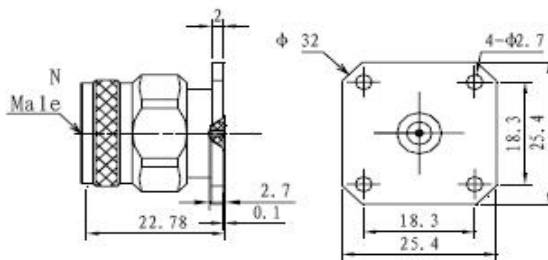

P/N	D
D341S18F01	0.018 inch/0.46mm
D341S20F01	0.020 inch/0.51mm
D341S36F01	0.036 inch/0.91mm



SYNERGY TELECOM (P) LTD.

13-ES, RPS Flats, E-Block, Vileca Park, New Delhi - 110 018 (INDIA)
 Phone: +91-11-28533349 Fax: +91-11-28531435 Mobile: +91-9810138894
 Email: pradeep@rfconnectorhouse.com, MSN: pradeepagrawal@synergy@hotmail.com
 PRINCIPAL SITE: <http://www.vinncom.info> Skype Account: pradeepag
 My trademarker ID: synergytelecom: www.rfconnectors.info



pdfMachine

A pdf writer that produces quality PDF files with ease!

Produce quality PDF files in seconds and preserve the integrity of your original documents. Compatible across nearly all Windows platforms, if you can print from a windows application you can use pdfMachine.

Get yours now!

N Series Bulkhead Flange Connectors



P/N	A	a	B	b
D340M01F01	25.4	25.4	18.28	18.28
D340M01F02	17.52	17.52	12.7	12.7
D340M01F03	12.7	12.7	8.64	8.64
D340M01F04	28	18	21	10



SYNERGY TELECOM (P) LTD.

13-15, RPS Flats, E-Block, Vileca Park, New Delhi - 110 018 (INDIA)
 Phone: +91-11-28533349 Fax: +91-11-28531435 Mobile: +91-9810138894
 Email: pradeep@rfconnectorhouse.com, MSN: pradeepgrows@synergy@hotmail.com
 PRINCIPAL SITE: <http://www.vilncom.info> Skype Account: pradeepg
 My trademanager ID: synergytelecom - www.rfconnectors.info

pdfMachine

A pdf writer that produces quality PDF files with ease!

Produce quality PDF files in seconds and preserve the integrity of your original documents. Compatible across nearly all Windows platforms, if you can print from a windows application you can use pdfMachine.

Get yours now!